


HOW TO MOUNT YOUR BIKE RACK AND BIKE


For Illustrations please visit http://www.amazingbikerack.com/abr_pics.html

- 1) Assemble unit as shown. Place J-tube into License plate holder and insert locking pin. Remove Phillips head "set screw" and slide each V-bracket onto Horizontal Bar (in opposite directions). Insert "Allen Bolts" under each V-bracket and tighten with supplied Allen wrench. Re-install Philips head "set screw" in arm (to prevent the V-Brackets and Horizontal Bar from sliding).
- 2) Slide the 1 ¼ " Winged Thumb bolt through the loop in the end of the trunk strap. Insert into the side of the Horizontal Bar and screw in *tightly!!!*
- 3) Secure trunk strap(s) on edges of trunk and pull **TIGHT!!!** (to remove flexing). Loop the extra length around the strap.
- 4) Mount bikes in opposite directions and push bike vertical frame tube into V-bracket first and secure with Velcro straps (and tighten securely). Attach 20" Velcro strap around bike frame thru the front wheel to secure wheel. Make sure bikes are as close to the vehicle as possible and place inside bike's pedal nearest to car to upright position.

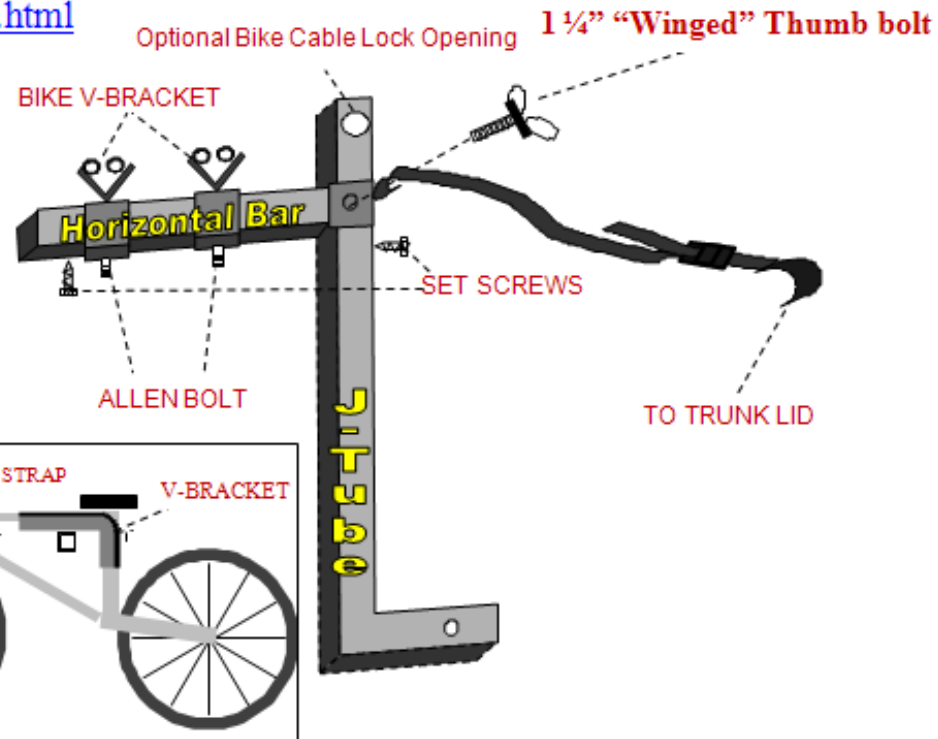

CAR AND TRUNK LID MOUNT

General layout shown below, see video and drill-mounting instructions for detailed instructions.

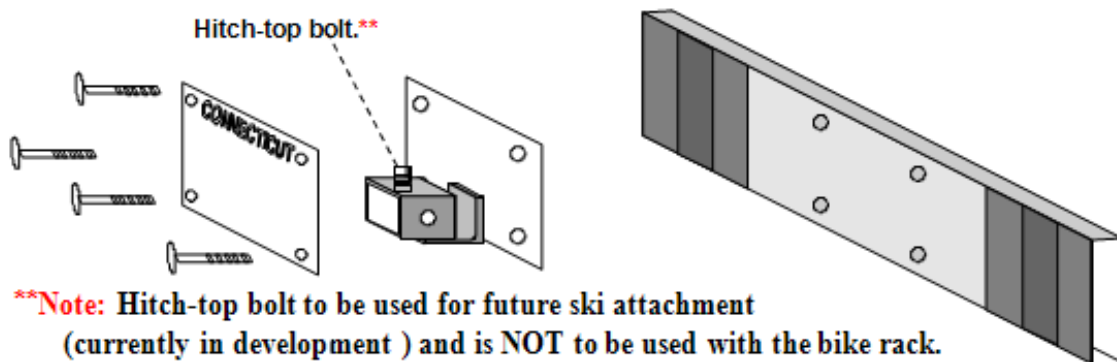

IMPORTANT:

Some vehicles, in which four license plate bolt holes are not standard or in which mounting with screws won't provide a secure fit **WILL REQUIRE DRILLING.**

Please visit our "[DRILL-MOUNTING INSTRUCTION PAGE](#)" for instructions on drill mounting the rack.

WARNING: All straps and knobs must be tightened before each use to insure safety of both vehicle and bikes. Amazing Bike Rack Inc. assumes no liability for improper use or installation of their products.

QUESTIONS? E-mail: info@amazingbikerack.com